

Dog Auto Harness Fit Instructions—SM, MD & LG Sizes

This harness is designed to be custom fit for your dog. After the harness is custom fit for your dog, the harness may be installed and removed quickly Fig. 2.




After the harness is installed, adjust BOTH metal slide buckles evenly to provide a snug but comfortable custom fit as shown in Fig.3. After custom fit is obtained, the excess length may be cut off 3 inches from below the buckle. (the cut ends of webbing may be heated to reduce fraying) Regularly check the harness for a snug comfortable fit.

Tether Use Instructions

Fold the harness flap down and reveal BOTH harness loops as shown in Fig. 1. Hook BOTH loops with the tether carabiner as shown in Fig. 2.



Hook the opposing end of carabiner in the rear seat in one of two places:
A.) Seat belt buckle loop
B.) Infant seat anchor located in between the seat under the child seat icon.

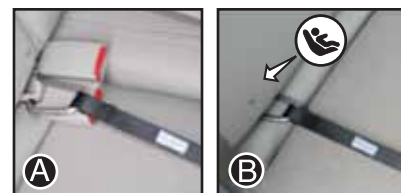

Adjust the tether length to allow your dog to stand easily as shown in Fig. 3. The tether should NOT allow the dog to roam the back seat!



Dog Auto Harness

Please read all safety tips and instructions before using this harness

For the comfort and safety of your dog:

- Gradually introduce your dog to the new harness. Like with anything new, it may take a few times for your dog to get used to it.
- Never leave pets unattended.
- Not recommended for use in front seats with airbags.
- Inspect your harness before every trip. Replace components or entire harness if there are any signs of wear.

For the safety of the occupants of the vehicle:

- To avoid the dog becoming a projectile, always tether the dog.
- To avoid propelling the dog into occupants, do not seat passengers next to the dog.
- To avoid entangling occupants if the dog jumps or is propelled sideways, do not seat passengers next to the dog.
- To avoid entangling occupants, tether the dog in the center of the rear seat.
- To avoid dog slipping out of the harness adjust harness to proper fit and check regularly
- To minimize the chances of the harness or tether failing in a crash, check for wear and damage regularly
- Consult your vehicle owner's manual for warnings or instructions about restraint of humans and pets.

Contact us at www.berganexperience.com or 1-866-217-9607 to find replacement parts.